

## SL HSPL SOUNDBAR


SL Multi Soundbar high sound pressure level version.  
This Soundbar version has been specially designed and  
Engineered for application where very high sound  
pressure levels are required, matching the larger  
Artcoustic speaker models, such as the 12-6, 16-8 and  
24-12 SL models

Operating Range: 80 Hz (-3 dB) to 40 kHz  
Sensitivity: Single Channel 102 dB / LCR 94 dB  
Maximum Power Handling 2 hours of 6 dB crest factor pink noise,  
Single Channel 360 Watt RMS / LCR 60 Watt RMS (AES Standard)  
Impedance: Single Channel 4 ohms / LCR 13 ohms nominal  
Average Peak SPL: Single Channel 124 dB / LCR 116 dB  
Weight: BESPOKE  
Dimensions: H: 100 W: BESPOKE D: 80 mm  
Cabinet: Black, White, RAL, NCS  
Screen: Black, White, RAL, NCS, Digital Print



## SCHEMATICS

dimensions are in mm

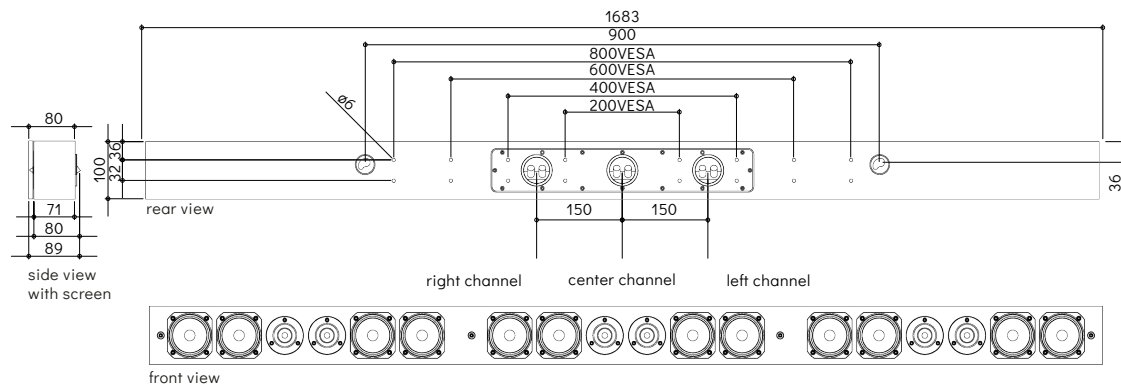

## POLAR RESPONSE

horizontal polar response 2m

16000Hz -----  
6500Hz ----  
2500Hz ---  
1000Hz —

vertical polar response 2m

3D polar response 2m

