


SN120

OUTDOOR 360° LOUDSPEAKERS



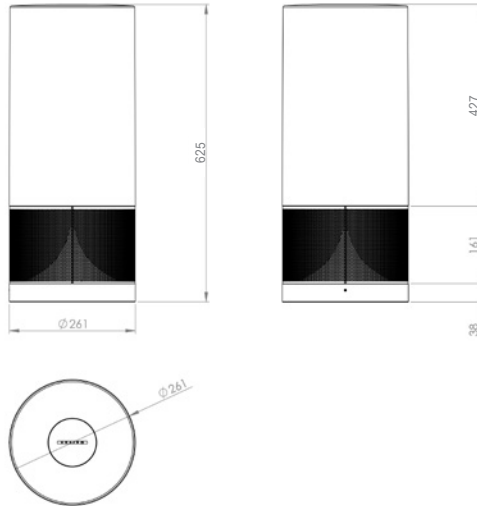



Loudspeaker (8 Ω)



Loudspeaker + Led White
Loudspeaker + Led RGB



Line transformer
G-Former™

- Green 
- Gray 
- White 
- Corten effect 

| | |
|--------|----------------------|
| SN120V | SN120V-W SN120V-R |
| SN120Y | SN120Y-W SN120Y-R |
| SN120B | SN120B-W SN120B-R |
| SN120Z | SN120Z-W SN120Z-R |

Code: **TRT055**

Nominal power (W) 50

Input voltage (V) 70 / 100

Frequency response (Hz) 40 - 21K

Output power on 8 Ω (W) 50,0-37,5-25,0

Dimensions H x W x D (cm) 7,2 x 7,2 x 3,8

Weight (Kg) 0,41

| | |
|-----------------------------|----------------------|
| Material | Technopolymer |
| Type | Pneumatic suspension |
| Loudspeaker Ø (cm) | 1 x 20,0 |
| Power RMS (W) | 120 |
| Max Power (W) | 240 |
| Frequency response (Hz) | 40 - 19K |
| Sensitivity dB (2,83V/1m) | 92 |
| Nominal impedance (Ω) | 8 |
| International Protection IP | 35 |
| Temperature range (°C) | -20 / +80 |
| Dimensions H x W x D (cm) | 62,5,0 x 26,0 x 26,0 |
| Weight (Kg) | 6,90 |

The TRT055 is a 70V / 100V toroidal transformer specifically designed for outdoor use.

Ground anti-theft kit



Code **HRX031** Dimensions H x W x D (cm) 33,0 x 15,0 x 10,0




Marine Speaker




| | White LED | RGB LED |
|------------------------|---------------------------|---------------------------|
| Power supply | 24 V | 24 V |
| Power | 8,5 W | 12 W |
| Dimmable | √ | √ |
| Led colour temperature | 3000 K | Red - Green - Blue |
| Emission angle | 120° | 120° |
| Operating temperature | -20 °C (min) +45 °C (max) | -20 °C (min) +45 °C (max) |

WHITE LED wiring diagram

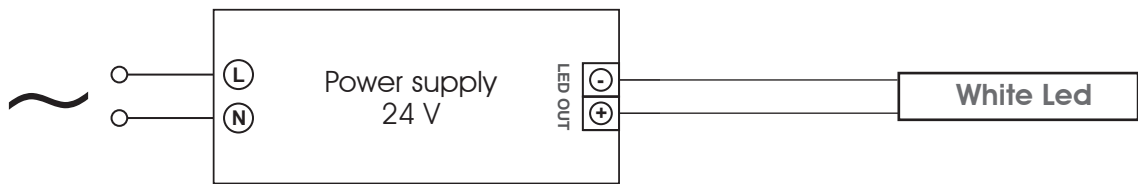

RGB LED wiring diagram

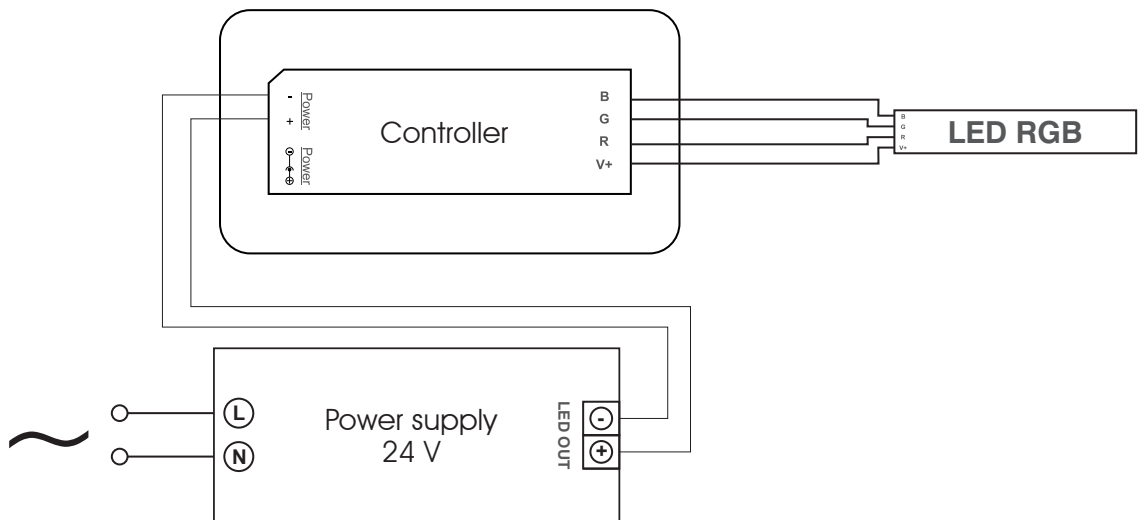

Marine
Speaker