

3G ULTRA 508POE Receiver


VBS-HDIP-508POE

Just Add
Power

All Audio Capable Receiver

The Just Add Power 3G Ultra 508POE Receiver distributes 4K video and supports all lossless audio formats over a single Catx cable.

The 508POE receives and processes a 4K or lower-resolution source from a Just Add Power Transmitter and distributes video to the designated display; features enhanced image play: image push, image pull, and image pop - along with all the 4K Receiver system wide features from the 3G Ultra product line.

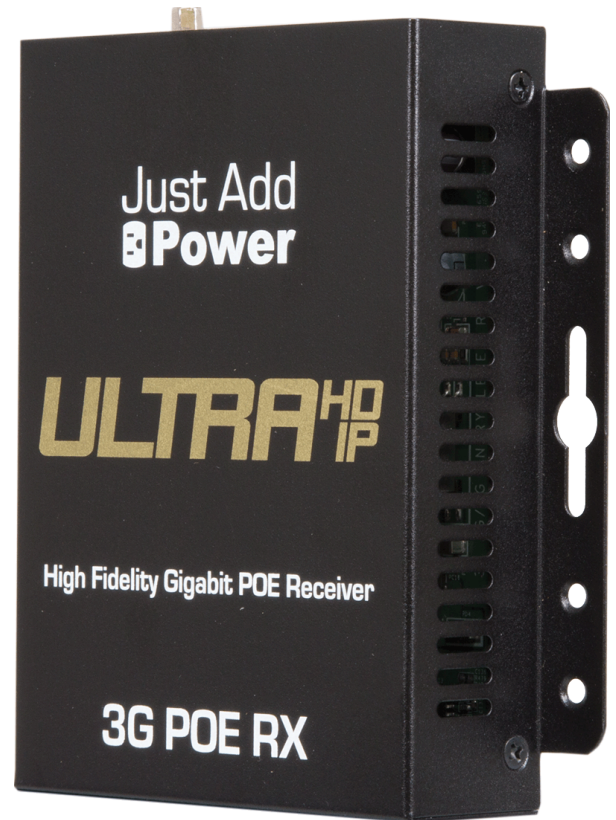

Features


HDCP 2.2 Support	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system	Image Pull	Preview an image from any source or display in any web browser or control system - up to 10 fps
Image Pop	Display a custom logo or message as an overlay on any active screen	Integrated Endpoint Control	Control endpoints with RS232, IR and CEC
Image Push	Load a custom default image or logo for when no source is displayed onscreen	Scalability	Fully compatible with all 3G Ultra and 2G Omega products
		Video Rotation	Rotate your video by 90° for portrait or landscape display

3G ULTRA 508POE Receiver

VBS-HDIP-508POE


Just Add
Power

Front of Device:

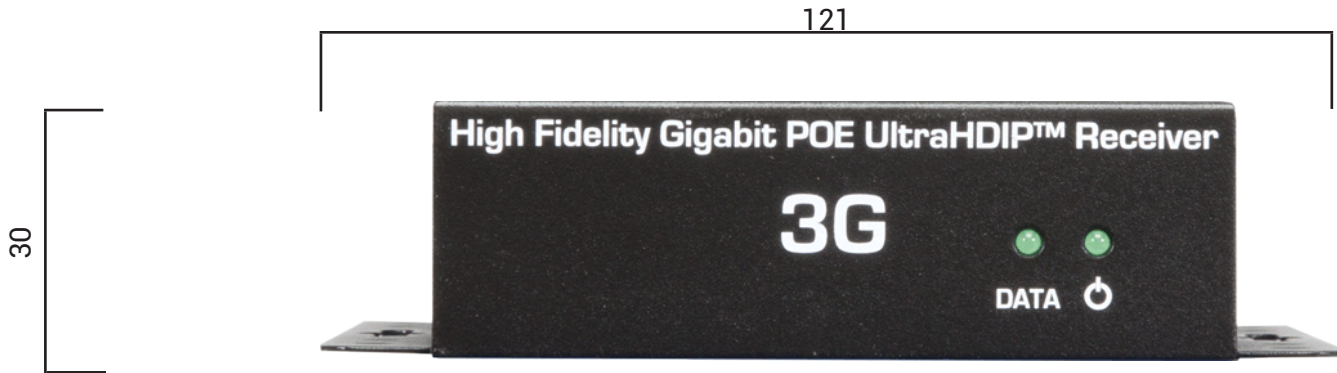

All measurements in millimeters (mm)

Back of Device:

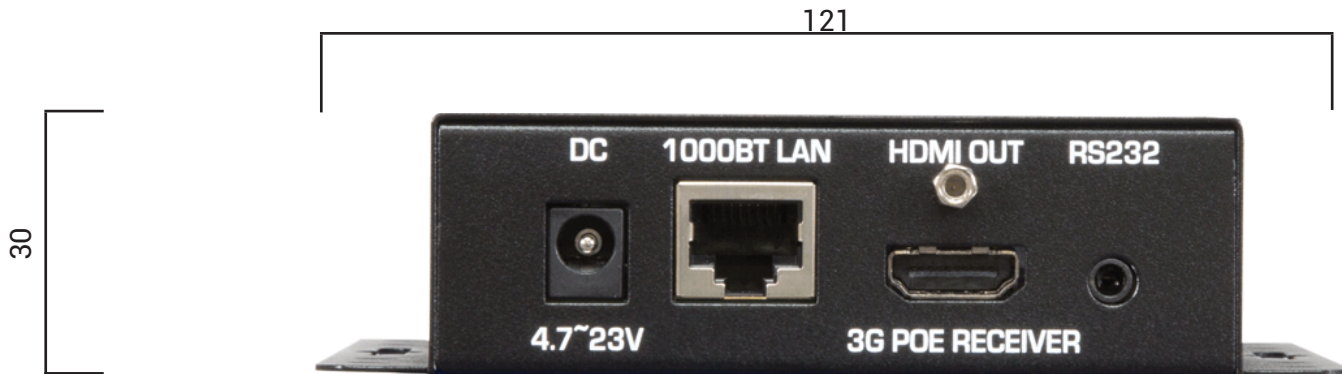

Specifications

Bandwidth	180-500 Mbps	POE	10 watts maximum
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI Out 3.5mm RS232 w/null modem
Dimensions & Weight	121 x 30 x 125 mm 5.0" x 1.2" x 4.9" in 0.27 kg / 0.6 lb	Power Supply (not included)	~4.7-23V 5.5mm/2.1mm, Positive tip
Encryption	Hardware-Based AES 256-bit Encryption of network video signal	Supported Resolutions	Up to 4096x2160 (interlaced & progressive)
Operating Temp	0-60 °C / 32-140 °F		