

3G ULTRA 708POE Transmitter

VBS-HDIP-708POE

Just Add
Power

All Audio Capable with Stereo Out Transmitter

The Just Add Power 3G Ultra 708POE with Stereo Audio Extraction Transmitter supports all lossless audio formats – including Dolby Atmos®.

Input stereo audio to enable the stereo audio extraction port for feed into a stereo audio distribution matrix.

Distribute 4K video, stereo audio, and breakout analog audio on a single device - along with all the 4K system wide features from the 3G Ultra product line.



Features

Audio	All lossless audio supported - including Dolby Atmos® Stereo output when input is stereo compatible	Image Pull	Preview an image from any source or display in any web browser or control system - up to 10 fps
HDCP 2.2 Support	Display content with HDCP 2.2 copy/content protection on any HDMI screen in system	Integrated Endpoint Control	Control endpoints with RS232, IR and CEC
		Scalability	Fully compatible with 3G Ultra and 2G Omega products

3G ULTRA 708POE Transmitter


VBS-HDIP-708POE

Just Add
Power

Front of Device:



Back of Device:

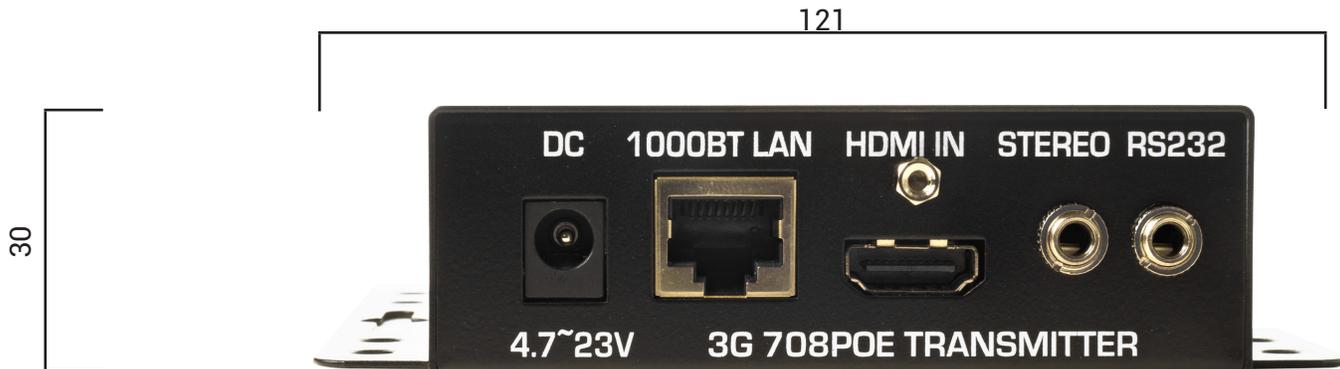

Specifications

Bandwidth	180-500 Mbps	POE	10 watts maximum
Compliance	HDCP 2.2 RoHS/FCC/CE	Ports	Gigabit Ethernet HDMI In 3.5mm Stereo Out 3.5mm RS232 w/null modem
Dimensions & Weight	121 x 30 x 125 mm 4.8" x 1.2" x 4.9" in 0.27 kg / 0.6 lb	Power Supply (not included)	~4.7-23V 5.5mm/2.1mm, Positive tip
Encryption	Hardware-Based AES 256-bit Encryption of network video signal	Supported Resolutions	Up to 4096x2160 (interlaced & progressive)
Operating Temp	0-60 °C / 32-140 °F		