

# 3G ULTRA 709P2P Transmitter

VBS-HDIP-709P2P

Just Add  
**Power**

## All Audio Capable with 40W POE Injector Transmitter

The 3G Ultra 709P2P Transmitter utilizes a single power input to distribute video, audio, and power over Ethernet to all downstream devices over the network.

### Specifically Built for Point-to-Point up to 40W

Combine with any Just Add Power Receiver to create a simple point-to-point connection, or with the 509POE Daisy-Chain Receiver to distribute video, audio and POE to up to four screens.

Ideal for single-source 2x2 video wall installations.



### Features

<b>Audio</b>	All lossless audio supported
<b>Integrated Endpoint Control</b>	Control endpoints with RS232, IR, and CEC

<b>Image Pull</b>	Preview an image from any source or display, in any web browser or control system, at up to 10 fps
<b>Scalability</b>	Fully compatible with all 3G Ultra and 2G Omega products

# 3G ULTRA 709P2P Transmitter

VBS-HDIP-709P2P


Just Add  
**Power**

## Front of Device:



All measurements in millimeters (mm)

## Back of Device:

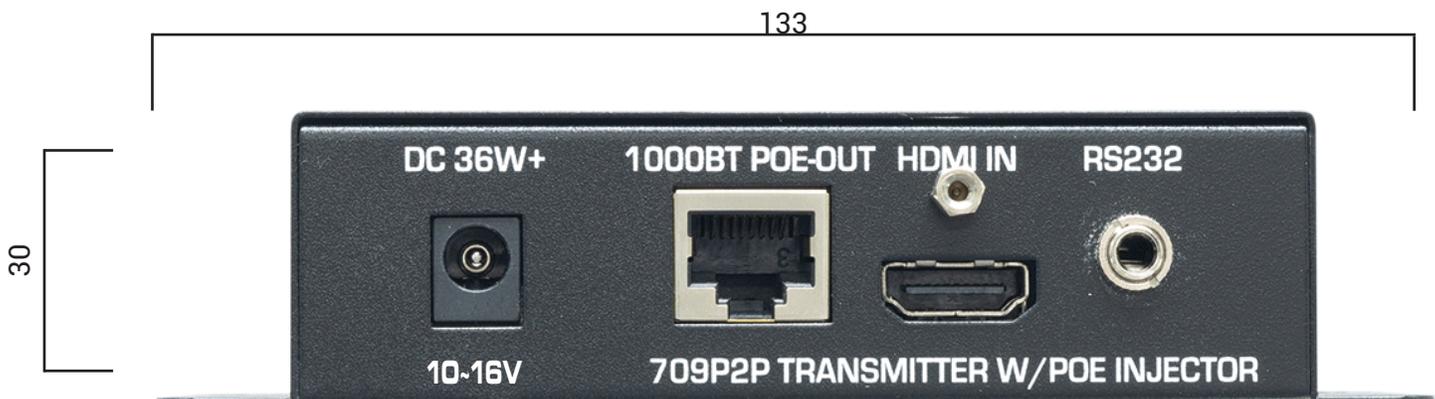

All measurements in millimeters (mm)

## Specifications

<b>Bandwidth</b>	180-500 Mbps	<b>POE Out</b>	40 watts maximum 10 watts per POE device
<b>Compliance</b>	HDCP 2.2 RoHS/FCC/CE	<b>Ports</b>	Gigabit Ethernet HDMI In 3.5mm RS232 w/null modem
<b>Dimensions &amp; Weight</b>	133x 30 x 125 mm 4.9" x 1.2" x 5.2" inch 0.36kg / 0.8 lb	<b>Power In</b>	10~16V 20 watts minimum 5.5mm/2.1mm, Positive tip
<b>Encryption</b>	Hardware-Based AES 256-bit Encryption of network video signal	<b>Supported Resolutions</b>	Up to 4096x2160 (interlaced & progressive)
<b>Operating Temp</b>	0-60 °C / 32-140 °F		